




PIATTO PANELLYS PRO II - 120 X 30 

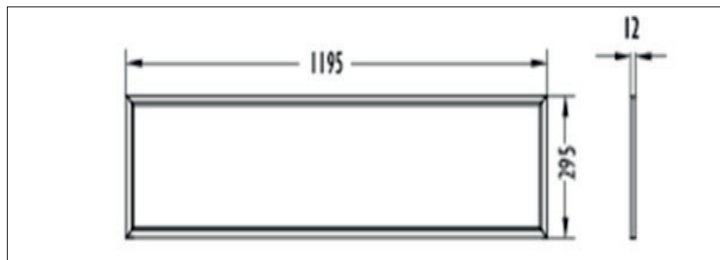


Piatto Panellys PRO II - 120 x 30 
45W LED
3000-3300K, CRI>80, 3400lm (r)
H: 1,2 B: 119,5 D: 29,5

Art. nr. 544524539
Elnr. 3258330

Tridonic 
45W LED driver
1050mA (30-42V)
(Ikke dimbar)
H: 3,1 B: 13,0 D: 6,8

Art. nr. 304521050
Elnr. 6631992


Hytronik 
40W LED driver
350-1100mA (12-58V)
(Dimbar DALI/ Switch-dim/ 1-10V)
H: 3,0 B: 12,3 D: 7,9

Art. nr. HED2040(9803)
Elnr. 6632209



Ikke dimbar



Dimbar LED 
DALI - Switch Dim - 1-10V

Armatuur

Spenning / strøm
Strømforbruk
IP

Materiale avdekning
Farge avdekning
Materiale armaturhus
Farge armaturhus

Wire for nedhengt


Lyskilde

Lyskilde (std.)
Lumen reell (fra armatur)
Fargetemperatur
Lysspredning
Fargegjengivelse
Beregnet L70 levetid

220-240V
45W
20

PMMA
Hvit/ frosted
Aluminium
Hvit

150cm (art. nr. 314520002)



Epistar
3400lm (r)
3000-3300K
180gr.
>80
50.000t

Strømforsyning

Strømforsyning
Spenning (input)
Frekvens (input)
Strøm (output)
Spenning (Output)
Omgivelsestemperatur
Maks TC
PF
Totalforbruk

Tridonic LED driver
220-240V AC
50/60Hz
1050mA
30-43V
-20-50C
90C
0,96
42,1W

Hytronik LED driver
220-240V AC
50/60Hz
350-1100mA
12-58V
-20-45C
80C
0,95
42,5W

Inkl. 200cm
kabel m/ plugg & stikk.

Inkl. 150cm
kabel m/ plugg